


DIRECTIONAL FLOW →

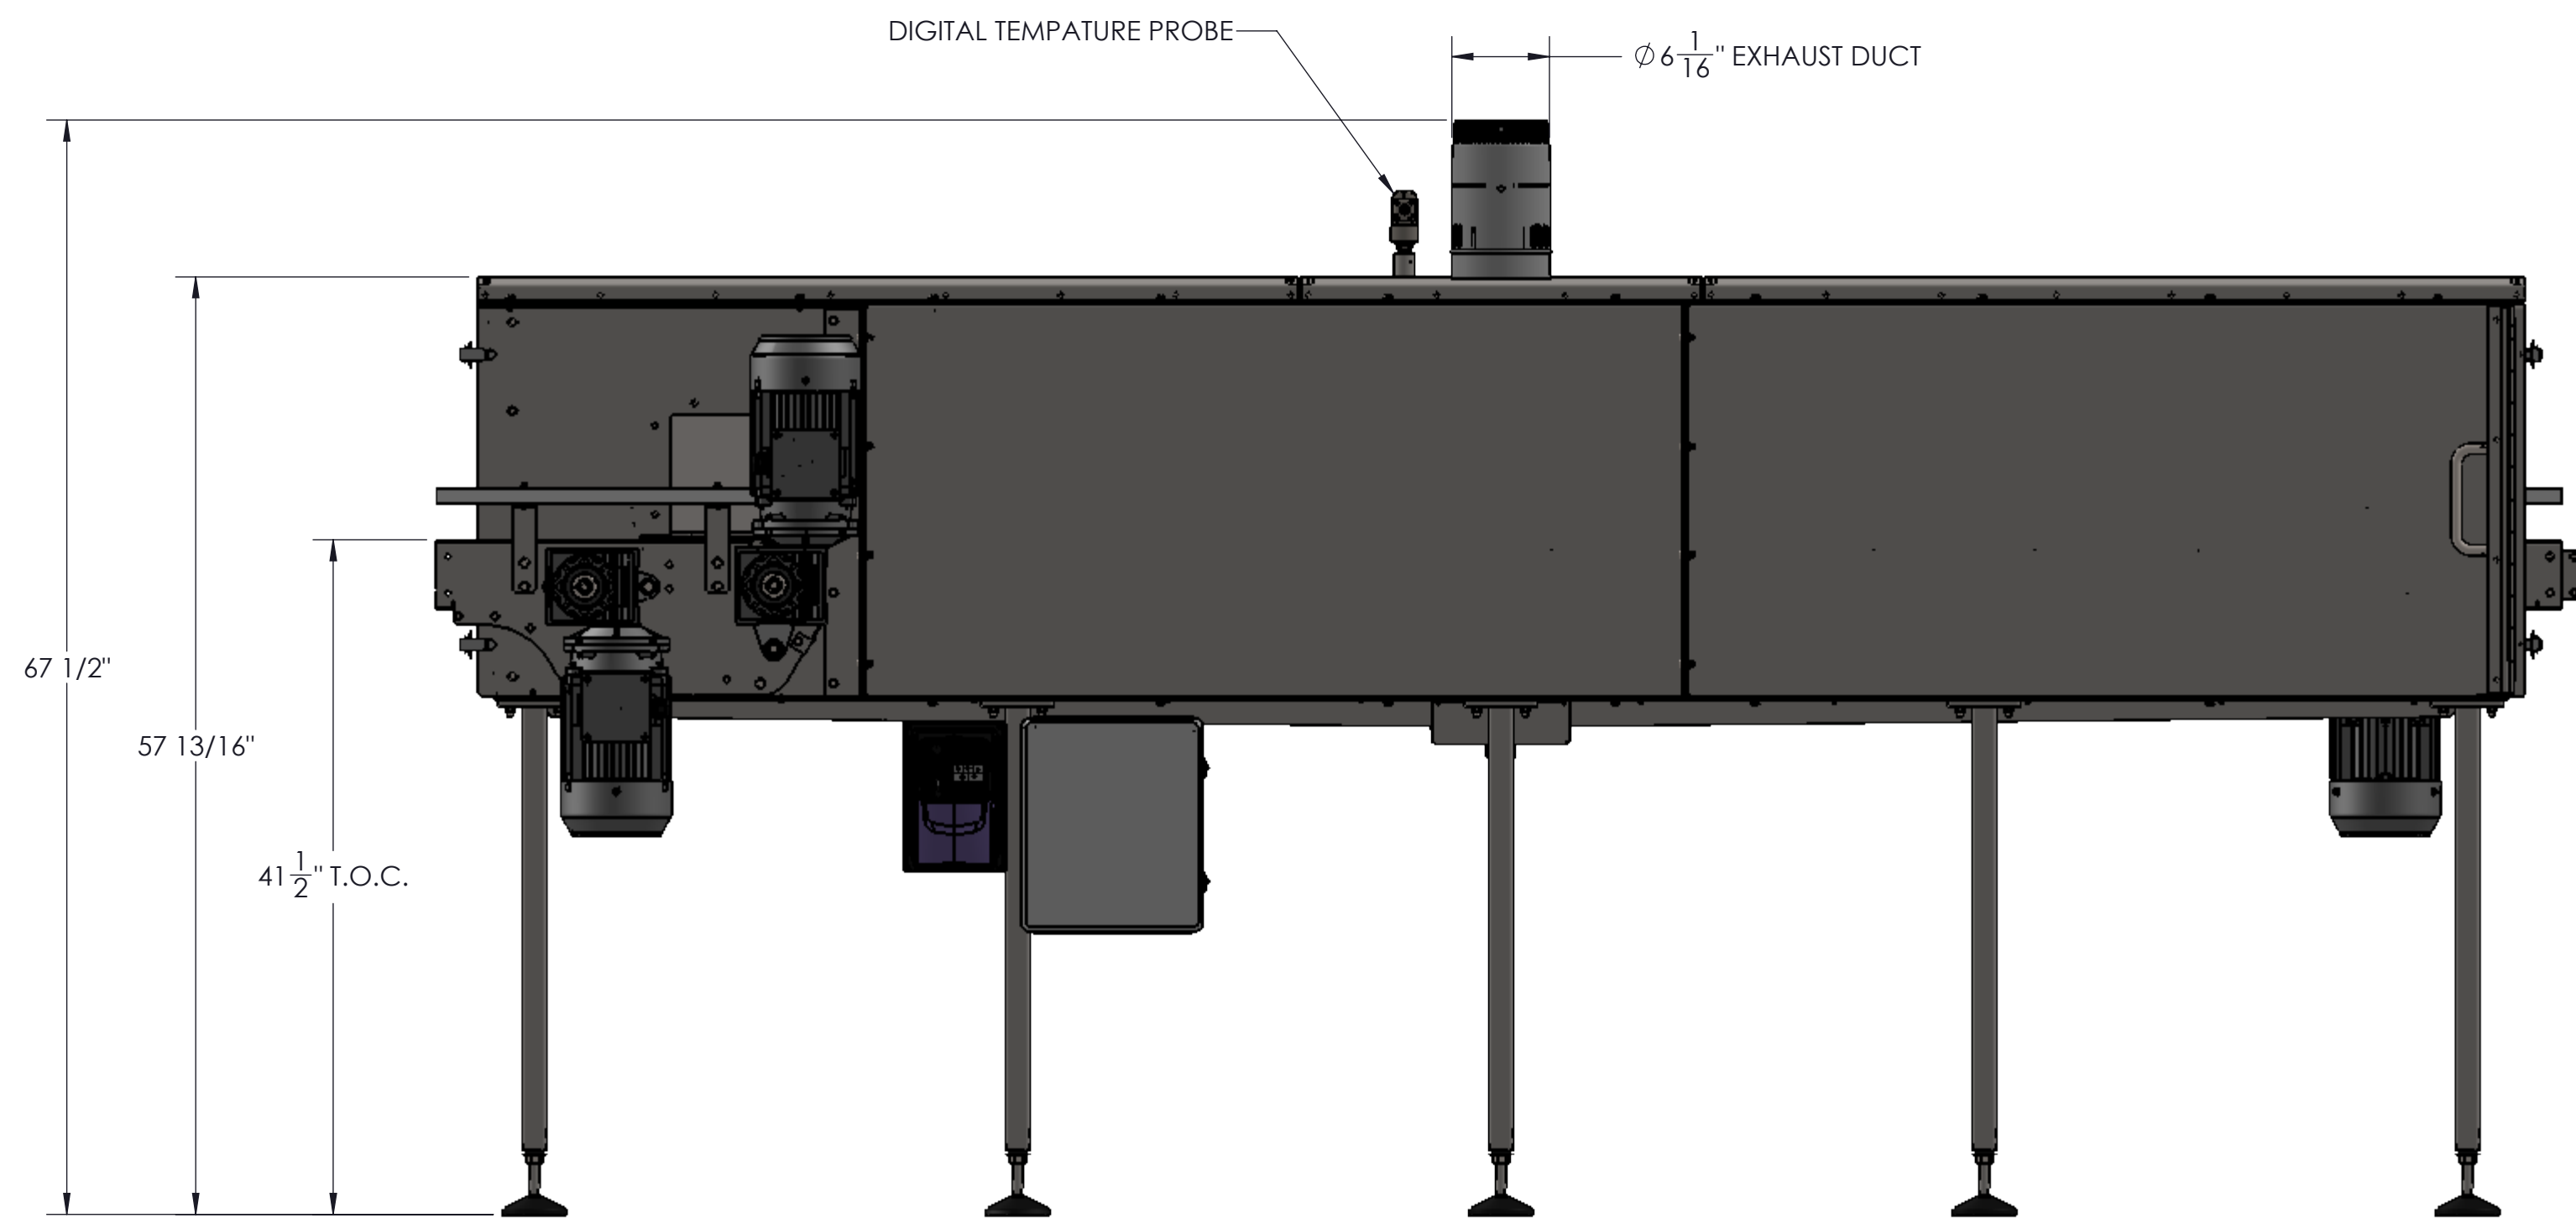

310100: WARMING TUNNEL
 Conveyor Power Requirement: 230/480VAC Three Phase
 Water Drainage: 1"FNPT

Shipping Weight: 800lbs
 Overall Size: 132" L x 40" W x 66" H


310100-S: STEAM WARMING
 Power Requirement: 120VAC Single Phase
 Steam Minimum Pressure: 30PSI
 Steam Maximum Pressure: 60PSI
 Steam Pounds per Hour Max: 230lbs/hr
 Steam Inlet Connection Size: 1/2FNPT
 Steam Evacuation: 6" I.D. Ductwork

Blower Cabinet: 310830
 Blower Power Requirement: 230/480VAC Three Phase

310100-W: HOT WATER WARMING
 Power Requirement: 120VAC Single Phase
 Water Pressure: 20-40P.S.I.
 Water Consumption: 3.9G.P.M. @ 30P.S.I.
 Water Inlet Connection Size: 1/2MNPT
 Heat Evacuation: 6" I.D. Ductwork

310100-E: ELECTRICAL AIR WARMING
 Power Requirement: 120VAC Single Phase
 Heat Evacuation: 6" I.D. Ductwork

Air Heating Skid: 95"L x 38"W x 62"T
 Air Skid Power Requirement: 230/480VAC Three Phase

UNLESS OTHERWISE SPECIFIED		3.25TTC CONVEYOR		
DIMENSIONS ARE IN INCHES U.O.N.		WARMING TUNNEL		
DRAWING TOLERANCES:				
FRACTIONAL:	1/32"	MATERIAL:	S.S. CONSTRUCTION	PART #:
ANGULAR:	0.5°			320100-BROCHURE-D
DECIMAL:	.010"	FINISH:	#4 POLISH	SCALE:
BREAK ALL SHARP EDGES				1:12
DWG BY: JHG				BORDER SIZE: D
DATE: 9/13/2021				SHEET 1 OF 1
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF PALMER BEVERAGE SYSTEMS, LLC. IT IS TO BE USED ONLY FOR THE PROJECT AND LOCATION SPECIFICALLY IDENTIFIED HEREIN. ANY REUSE OR MODIFICATION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF PALMER BEVERAGE SYSTEMS, LLC IS STRICTLY PROHIBITED.</small>				
<small>PALMER BEVERAGE SYSTEMS, LLC 3758 HAVENWOOD AVE, SUITE 223 CHICAGO, IL 60611 U.S.A. PH: (773) 656-5552 FAX: (773) 230-6332 www.palmerbeveragesystems.com</small>				